

Displaying 800 Series

Technical Product data sheet



Displaying 800 Series

This displaying flowmeter incorporates the 800 series flowmeter with a programmable display to give both total and rate. It has four digit 8mm high LCD display that can be configured to display rate in engineering units per second, minute or hour. The total function has a selectable decimal point and may be reset at any time by pressing and holding the reset button. It is designed to give high performance and competitive pricing with 6 flow ranges from 0.05 to 15 litres per minute. It's totally non-metallic wetted components make this the ideal choice for the metering of aggressive chemicals including ultra-pure water. The standard inlet tubes are either barbed to accept an 8mm hose or " John guest push-on connections. For OEM use alternatives are available. The bearings are made of sapphire for long life and reliability, the body is moulded PVDF as standard and the 'O' ring seal is typically Viton™ although alternatives are available.


Features

- Low cost
- 4 digit rate/total display
- PVDF body
- 1- 2% FSD
- Sapphire bearings
- Hall Effect sensor
- 6 Flow ranges
- Auto cal feature
- Pulse output
- 10 Bar rating
- 8 mm hose or " tails*
- 0.1% Repeatability
- 8 to 12 V dc
- 55°C Max
- 0.081 kg

* John Guest style connections

Ideal for

- Laboratory tests
- Cooling equipment
- Semiconductor plant
- OEM applications

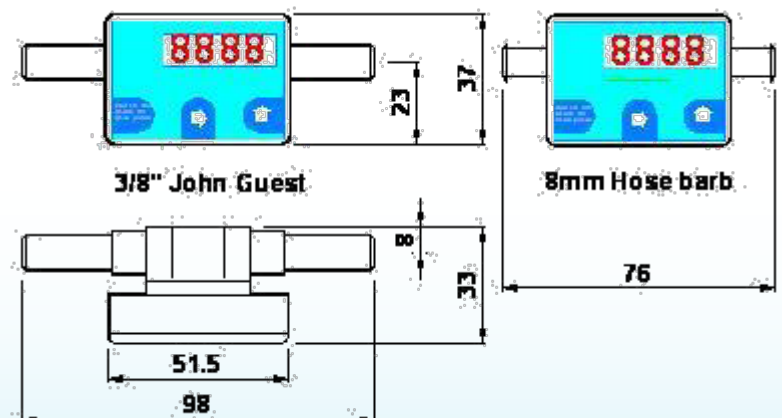

800 Series Flowmeter

Order Codes

Flow range 803
L/min 815
845
865
810
824

O'ring mtl V - Viton™
N - Nitrile
E - EPDM
S - Silicon

Options 0 - Standard
2 - NPN - PNP

Body mtl P - PVDF
O - Special

Special OEM code 0 - Standard
U - Uncalibrated

e.g. **865-VOP-O** is a flow range of 0.25 to 6.5 L/Min, Viton™ seal, standard, PVDF bodied flowmeter with a 6 point traceable water calibration.

Standard Materials of Construction

Body and cap - PVDF
'O' Ring seal - Viton™
Magnets - Ceramic
Bearings - Sapphire

Model	Flow range L/Min	Linearity % FSD	Typical Freq. Hz.	Approx 'K' Factor
803	0.05 - 0.5	2.0	142	17000
815	0.12 - 1.5	2.0	175	7000
845	0.20 - 4.5	1.5	260	3500
865	0.25 - 6.5	1.5	230	2100
810	0.30 - 10.0	1.0	235	1420
824	0.50 - 15.0	1.0	245	980

800 Series Flowmeter

At the heart of the meter is a precision turbine that rotates freely on robust sapphire bearings and contains chemically resistant ceramic magnets that are detected through the chamber wall by a Hall effect detector. The output is a stream of NPN/PNP pulses that are readily interfaced with most electronic display or recording devices. This combination of materials and technology ensures a long life product with reliable operation throughout. There are two temperature options 125°C or 60°C. The 60°C unit is fitted with two LEDs to monitor the power and pulse output, both NPN and PNP transistor outputs are available on each flow meter

