


OG3 10L/Min Oval Gear Meter

Technical Product data sheet

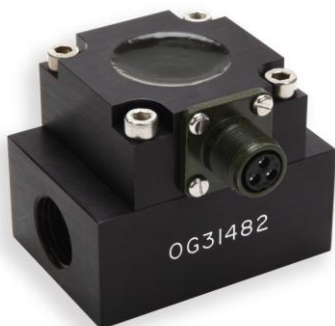

OG3 10L/Min Oval Gear Meter

The compact rugged OG3 oval gear flowmeter is designed to give high performance with a low cost of ownership. It has a standard flow range from 0.05 to 10 L/Min on 30 Cstk oil and 0.5 to 10 L/min on water like liquids. It can have totally non-metallic wetted components, PEEK™, ceramic and an elastomer which makes this the ideal choice for the metering of aggressive chemicals. The standard inlet and outlet are ½" female threads. For OEM use alternatives, including manifold mountings, are available. The standard model is 316 St St with Viton™ 'O' ring seal.

Features

- Excellent chemical resistance
- Rugged construction
- High visibility
- Individual calibration
- High viscosity capability
- Low pressure loss
- No flow conditioning required
- Compact meter assembly
- Hall, reed switch or Namur sensor
- Accuracy 0.5% FSD water
1.0% reading oil

±0.5% reading *

0.1% repeatability

IP67/NEMA 4 protection

Models to 700 Bar


Non-metallic option

* When used with our metra-smart instrument

Ideal for

- Engine test
- Critical oil flow
- High viscosity fluids
- OEM equipment

At the heart of the meter are a pair of toothed oval gears one of which contains chemically resistant magnets, the gears rotate freely on robust bearings. Rotation is detected through the chamber wall by a Hall Effect detector or a reed switch giving approximately 400 pulses per litre passed. The output is an NPN pulse or a voltage free contact closure either of which is readily interfaced with most electronic display or recording devices. This combination of materials and technology ensures a long life product with reliable, accurate operation throughout.

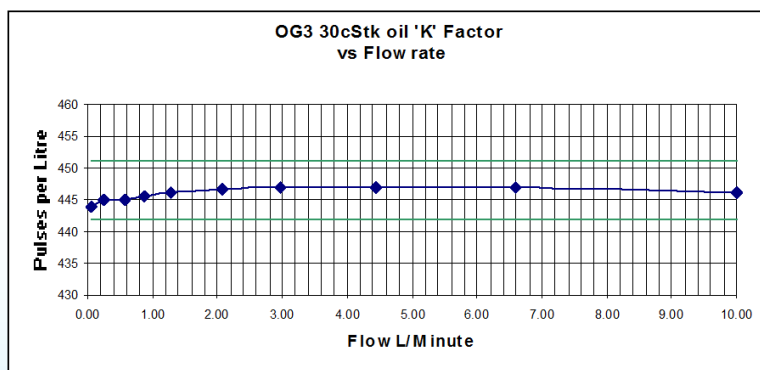


OG3 10L/Min Oval Gear Meter

Order Codes


Model	OG3
Body mat'l	S - 316 St St 50 bar std A - Aluminium 10bar max P - PEEK™ 10 bar max
Temp rating	S = 80°C / 158°F T = 100°C / 212°F U = 150°C / 300°F
Pressure Rating	5 - 50 Bar 750 PSI (St St) 1 - 10 Bar 150 PSI (Al/ PEEK™) 4 - 400 Bar 5880 PSI (St St) 7 - 700 Bar 10150 PSI (St St)
Seal material	V - Viton™ N - Nitrile E - EPDM K - Kalrez
Detector type	H - Hall Effect R - Reed switch N - Namur
Pipe thread	H - ½" (OG3 std)
Connections	B - BSP F N - NPT F F - Flanged (specify)

e.g. A stainless steel meter rated at 80°C, 50 Bar, with Viton™ seal, Hall effect detector and a ½" BSP thread would have the order code :-
OG3-SS5-VHH-B

Sample product codes ⇒	Stainless standard OG3-SS5-VHH-B	Aluminium standard OG3-AS1-VHH-B	PEEK™ standard OG3-PS1-VHH-B
Flow range			
- Water	0.5 - 10.0 LPM	0.5 - 10.0 LPM	0.5 - 10.0 LPM
- 30 cSt Oil	0.05 - 10.0 LPM	0.05 - 10.0 LPM	0.05 - 10.0 LPM
Wetted mats			
- Body	316 St St	Aluminium	PEEK™
- Gears	Carbon filled PEEK™	Carbon filled PEEK™	Carbon filled PEEK™
- Seal	Viton™	Viton™	Viton™
- Magnet	Ceramic	Ceramic	Ceramic
Accuracy			
Water	± 0.5 % FSD	± 0.5 % FSD	± 0.5 % FSD
- 30 cSt oil	± 1.0 % Reading	± 1.0 % Reading	± 0.5 % FSD
Repeatability	± 0.1%	± 0.1%	± 0.1%
Detector Type	Hall effect	Hall effect	Hall effect
Terminations	Via M20 cable gland	MIL style instrument socket	4 Pin M12
Approx 'K' factor - Pulses/Litre	400	400	400


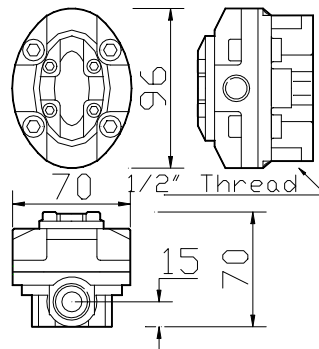


316 St St body

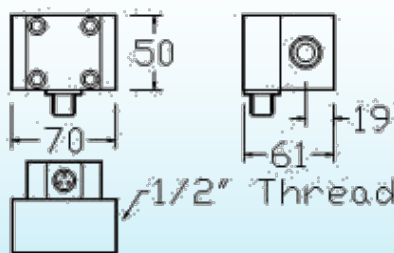

PEEK™ & Aluminium body

Weight in kg		
St St	- 50 Bar	1.350
Peek™	- 10 Bar	0.230
Aluminium	- 10 Bar	0.422
St St	- 400 Bar	3.000
St St	- 700 Bar	9.000

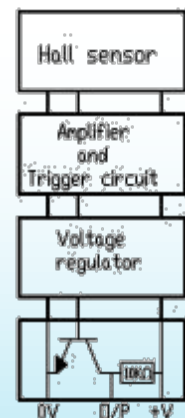

Sensor block diagram