

### Key Features

- Suitable for use with water, saline, fuels, oils and chemicals
- 316 Stainless Steel construction
- 0-5V Analogue output
- SAE 5-Bolt & 1.25" BSP thread mount housing
- High Accuracy  $\pm 2\%$
- $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$  operating temperature range
- Factory Calibrated
- No moving parts for high reliability

The GSlevel industrial specification Liquid Level Sensor is available up to 2m long and is designed specifically for industrial environments where monitoring of a variety of liquid types is required. The sensor uses solid state capacitive technology to sense the level of the liquid, with no moving parts, floats or other mechanical linkages to provide excellent long term reliability. Designed to operate at extreme operating temperatures, the industrial level sensor ensures high reliability in harsh industrial environments from  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ .

Built from 316 stainless steel, the level sensor will provide corrosion resistance in harsh environments.

The sensor features both SAE 5-Bolt and 1.25" BSP thread mounting options. A flange gasket and O-ring seal are supplied with each unit.

Gill Sensors quality control ensures that every GSlevel sensor is factory calibrated with temperature compensation to provide market leading accuracy of liquid level measurement.



#### ELECTRICAL

Supply Voltage	5 to 24V
Supply Current	<10mA @ 12VDC
Reverse polarity	Indefinitely

#### CONNECTION

Cable	20 AWG TYPE 44, DR25
Cable tail length	1000mm

#### ANALOGUE OUTPUT

Voltage Output Range	0.25v - 4.75V over max measurement range
Range Accuracy	$\pm 2\%$ Full Scale Deflection ( $20^{\circ}\text{C}$ )

#### MECHANICAL

Construction Materials	Stainless Steel 316, FEP, PEI
Probe Length (Dim X)	100mm to 2000mm (in standard increments)
Mounting	SAE 5-bolt pattern & 1.25" threaded
Weight	From 300g (dependant on length)

#### ENVIRONMENTAL






Ingress Protection	IP66, IP68
Thermal Shock	EN60945
Operating temperature	$-40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$
Humidity	93% RH at $40^{\circ}\text{C}$ EN60945
Corrosion resistance	Stainless steel 316 construction
Vibration	EN60945
Pressure	10 Bar (differential & absolute)
Seal Material	Nitrile (O-ring & Gasket)

#### COMPATIBLE MEDIUM

Fuel	Gasoline, Unleaded, LRP, Diesel
Water	Fresh water, Saltwater, Ethylene Glycol, Please consult Gill for other liquid compatibilities.

Sensor requires probe support for lengths beyond 650mm. Specifications subject to change without notice.





## WIRING

	Red	V+ (Power)
	Black	V- (GND)
	Orange	Analogue signal 0.25V to 4.25V
	Green	Serial Rx
	White	Serial Tx
Screen		

## PART NUMBERS

<b>4174-00-010-X</b>	
Length X (mm)	Standard increments
100 - 300	25mm
350 - 1000	50mm
1100 - 2000	100mm

Dimension X is customer specified in standard lengths as above

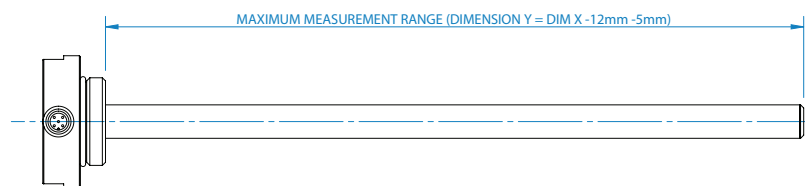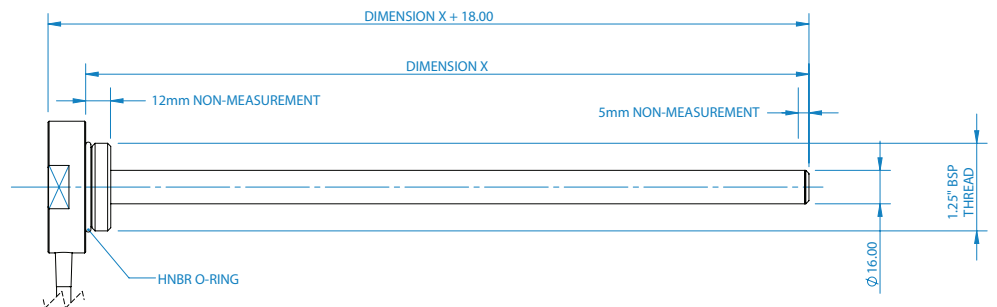

Sensor supplied with O-ring & gasket

Specifications subject to change without notice.

# GILL

## Gill Sensors

Saltmarsh Park, 67 Gosport Street  
Lymington, Hampshire, UK  
SO41 9EG

Tel: +44 (0) 1590 613 400  
Fax: +44 (0) 1590 613 401  
info@gillsensors.com



[www.gillsensors.com](http://www.gillsensors.com)

LD4174 (M) - Iss 1

Copyright © Gill Sensors 2014