

## EE23

## Humidity / Temperature Transmitter for Industrial Applications

### Calculation of Dew Point and Frost Point Temperature

The EE23 series stands for multifunctionality, highest accuracy, easy mounting and service.

The new IP65 water proof housing concept is based on three modules:

- back module with connectors
- middle module which accommodates the electronics
- cover module with optional display

It offers easy installation and the possibility for fast exchange of the sensor unit for service purposes.

For use in harsh industrial environments all models of the EE23 are available in a robust metal housing.

The EE23 can be employed in all common applications by choosing the appropriate housing combination.

- **Model A / B:** wall / duct mounting
- **Model C:** remote sensing probe has a working temperature range  $-40...120^{\circ}\text{C}$  ( $-40...248^{\circ}\text{F}$ )
- **Model H:** with remote miniature probe for concealed mounting (e.g. in museums) or in tight spaces.

The high quality HC series humidity sensor elements and newest microprocessor technology are the guarantee for:

- best accuracy over the whole working range
- display and output of relative humidity, temperature, dew point and frost point temperature
- small hysteresis
- excellent long term stability
- highest resistance to pollutants.

Easy configuration of the humidity and temperature outputs is made possible by the innovative design of the EE23 electronics. One can select between various current or voltage output signals.

One can very easily perform a two point humidity and temperature adjustment by using two push buttons on the PCB.

Further options are the integrated display, cable outlets via connectors, sensor coating and an hygrostate output for control and alarm purposes.



Model A



Model B



Model C



Model H

## Typical Applications

high end HVAC  
 climate chambers  
 process technology  
 dryers  
 clean rooms  
 green houses  
 stocks  
 meteorology

## Features

temperature range **-40...120°C (-40...248°F)**  
 traceable calibration  
 calculation of dew point / frost point temperature  
 two point humidity and temperature calibration  
 very easy mounting and maintenance  
 best accuracy over whole temperature range  
 remote sensing probe up to 20m (65.6ft)  
 alarm output

## Two Point Adjustment

With an easy routine the user can perform a fast and accurate two point adjustment of relative humidity and temperature.




## Display

The actual measured data can be indicated on the optional integrated display. It is possible to choose between relative humidity (RH), temperature (T), dew point (Td), frost point (Tf) or an alternating display of two values.



## Alarm Output

Simple control applications can be solved by the optional alarm output of the EE23. The user can set threshold and hysteresis by potentiometers.

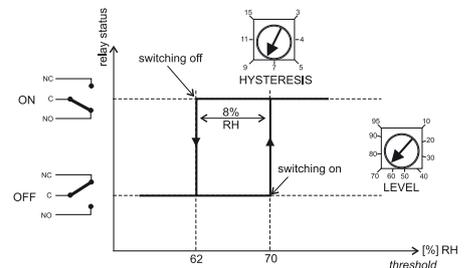

## Integrated power supply


A power supply, integrated in the back module of the housing, can be ordered optionally (100...240V AC, 50/60Hz; ordering code V01). The power supply V01 is available for both polycarbonate and metal housing and comes standard with two plugs for supply and outputs to allow an easy connection.




## Dimensions in mm

### Housing:

polycarbonate housing

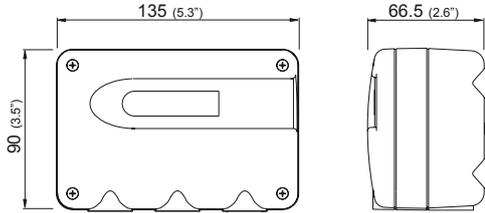


metal housing

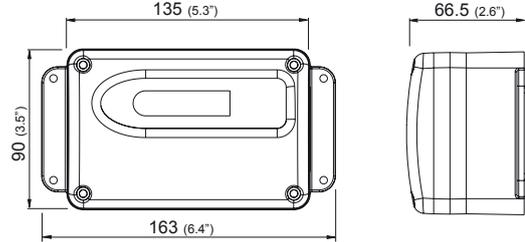


For use in harsh industrial environments all models of the EE23 are available in a robust metal housing. The very smooth surface and the rounded outlines allow for the use in clean rooms as well.


### Models:



**EE23-xAx**  
**Wall mounting**  
Probe material: PC

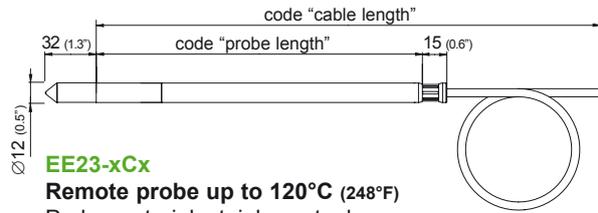


**EE23-xCx**  
**Remote probe up to 120°C (248°F)**  
Probe material: stainless steel

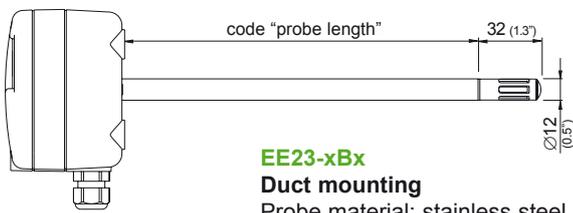

**EE23-xBx**  
**Duct mounting**  
Probe material: stainless steel

**EE23-xHx**  
**Remote miniature probe**  
Probe material: stainless steel



## Technical Data

### Measured quantities


#### Relative humidity

Humidity sensor <sup>1)</sup>	EE23-xA/B/Cx	HC1000-200
	EE23-xHx	HC105
Working range <sup>1)</sup>	0...100% RH	
Accuracy <sup>2)</sup> (including hysteresis, non-linearity and repeatability, traceable to intern. standards, administrated by NIST, PTB, BEV...)		
	<b>EE23-xA/B/Cx</b>	<b>EE23-xHx</b>
-15...40°C (5...104°F)	≤90% RH ± (1.3 + 0.3%*mv) % RH	± (1.8 + 0,3%*mv) % RH
-15...40°C (5...104°F)	>90% RH ± 2.3% RH	± 2.8% RH
-25...70°C (-13...158°F)	± (1.4 + 1%*mv) % RH	± (1.9 + 1%*mv) % RH
-40...120°C (-40...248°F)	± (1.5 + 1.5%*mv) % RH	-
Temperature dependence electronics	typ. ± 0.015% RH/°C	
Response time with metal grid filter at 20°C / t <sub>90</sub>	< 15 sec.	

#### Temperature

Temperature sensor element	EE23-xA/B/Cx	Pt1000 (class A, DIN EN 60751)
	EE23-xHx	Pt1000 (class B, DIN EN 60751)
Working range sensing head	EE23-xAx -40...60°C (-40...140°F)	EE23-xBx -40...80°C (-40...176°F)
	EE23-xCx -40...120°C (-40...248°F)	EE23-xHx -40...80°C (-40...176°F)

#### Accuracy

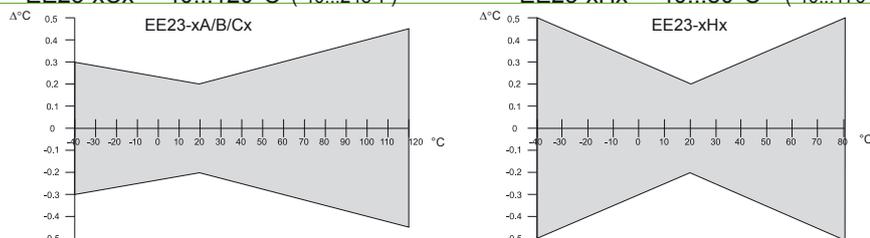

Temperature dependence of electronics	typ. 0.002°C/°C	
Outputs	0 - 1 V	-0.5 mA < I <sub>L</sub> < 0.5 mA
0...100% RH / xx...yy°C <sup>3)</sup>	0 - 5 V	-1 mA < I <sub>L</sub> < 1 mA
(temperature output scale adjustable by E+E or with configuration kit)	0 - 10 V	-1 mA < I <sub>L</sub> < 1 mA
	0 - 20mA	R <sub>L</sub> < 470 Ohm
	4 - 20 mA	R <sub>L</sub> < 470 Ohm

### Max. adjustable output scaling<sup>4)</sup>

		from	up to		units	
			EE23-A	EE23-B, H	EE23-C	
Humidity	RH	0	100	100	100	% RH
Temperature	T	-40 (-40)	60 (140)	80 (176)	120 (248)	°C (°F)
Dew-point temperature	Td	-40 (-40)	60 (140)	80 (176)	100 (212)	°C (°F)
Frost-point temperature	Tf	-40 (-40)	0 (32)	0 (32)	0 (32)	°C (°F)

### General

Supply voltage		
for 0 -1 V, 0 - 5 V outputs	10.5 - 35V DC or 12 - 28V AC	
for 0 - 10 V, 0 - 20 mA and 4-20 mA outputs	15.0 - 35V DC or 15 - 28V AC (optional 100...240V AC, 50/60Hz)	
Current consumption for voltage output		
for DC supply ≤ 25 mA	with alarm module: for DC supply ≤ 35 mA	
for AC supply ≤ 35 mA <sub>eff</sub>	for AC supply ≤ 60 mA <sub>eff</sub>	
Current consumption for current output		
for DC supply ≤ 50 mA	with alarm module: for DC supply ≤ 60 mA	
for AC supply ≤ 90 mA <sub>eff</sub>	for AC supply ≤ 110 mA <sub>eff</sub>	
Housing / protection class	PC or Al Si 9 Cu 3 / IP65; Nema 4	
Cable gland <sup>5)</sup>	M16x1.5 cable Ø 4.5 - 10 mm (0.18 - 0.39")	
Electrical connection <sup>5)</sup>	screw terminals max. 1.5 mm <sup>2</sup> (AWG 16)	
Working temperature range of electronics	-40...60°C (-40...140°F)	
Working temperature range with display	-30...60°C (-22...140°F)	
Storage temperature range	-40...60°C (-40...140°F)	


1) Refer to the working range of the humidity sensor 3) Refer to ordering guide 4) Refer to accuracies of calculated values (page 152) 5) Connection plugs refer to ordering guide  
2) The accuracy statement includes the uncertainty of the factory calibration with an enhancement factor k=2 (2-times standard deviation). The accuracy was calculated in accordance with EA-4/02 and with regard to GUM (Guide to the Expression of Uncertainty in Measurement).

CE compatibility according	EN61326-1	EN61326-2-3	ICES-003 ClassB	
	Industrial Environment		FCC Part15 ClassB	

**Alarm Module - optional**

Output	SPDT-Switch up to 250V AC/8A or 28V DC/8A	
	threshold	hysteresis
Setting range	10...95% RH	3...15% RH
Setting accuracy	± 3% RH	

**Humidity Sensor - Working Range**

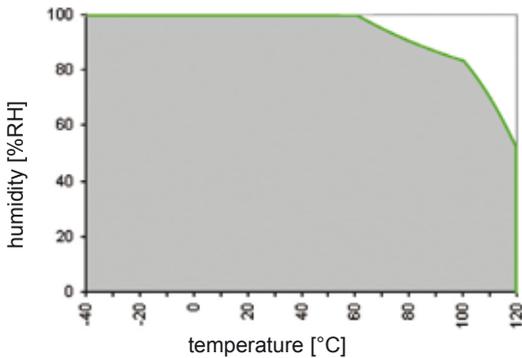


The working range of the humidity sensor element is shown in terms of humidity / temperature limits.

Although the sensors would not deteriorate beyond the limits, their performance can only be specified within the limits of the working range.

**Sensor Coating**

Operation in heavily polluted and/or corrosive environments is typical for many industrial processes and can lead to drift or damage of the humidity sensor and thus to false measured values. The unique protective coating developed by E+E for the sensing probe (ordering code: HC01) brings a significant improvement on the long-term stability of the transmitter in very dirty and aggressive environments.

**Connecting Diagram**

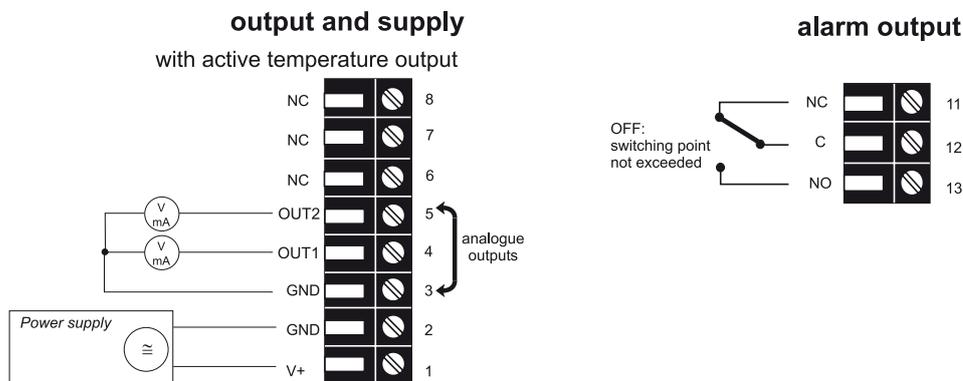

## Ordering Guide

		EE23-	EE23-
<b>Hardware Configuration</b>			
<b>Housing</b>	metal housing polycarbonate housing	<b>M</b> <b>P</b>	<b>M</b> <b>P</b>
<b>Type</b>	humidity + temperature	<b>FT</b>	<b>FT</b>
<b>Model</b>	wall mounting duct mounting remote probe up to 120°C(248°F) remote miniature probe	<b>A</b> <b>B</b> <b>C</b>	<b>H</b>
<b>Filter</b>	membrane filter 5mm stainless steel sintered filter PTFE filter metal grid filter H <sub>2</sub> O <sub>2</sub> filter	<b>3</b> <b>5</b> <b>6</b> <b>8</b>	<b>1</b>
<b>Cable length(incl. probe length; models C and H only)</b>	2m 5m 10m 20m	<b>02</b> <b>05</b> <b>10</b> <b>20</b>	<b>02</b> <b>05</b> <b>10</b> <b>20</b>
<b>Probe length (models B and C only)</b>	65mm 200mm 400mm	<b>2</b> <b>5</b> <b>6</b>	
<b>Display refer to software-code)</b>	without display with display	<b>D03</b>	<b>D03</b>
<b>Alarm output<sup>1)</sup></b>	no alarm output with alarm output	<b>SW</b>	<b>SW</b>
<b>Plug</b>	standard cable 1 gland M16x1.5; cable Ø 4.5 - 10 mm (0.18 - 0.39") 1 plug for supply + outputs	<b>C03</b>	<b>C03</b>
<b>Coating sensor</b>	no yes	<b>HC01</b>	
<b>Supply voltage</b>	15...35V DC / 15...28V AC integrated power supply 100...240V AC, 50/60Hz <sup>2)</sup>	<b>V01</b>	<b>V01</b>
<b>Software Configuration</b>			
<b>Physical parameters of outputs</b>	Relative humidity RH [%] (A) Temperature T [°C] (B) Dew point temperature Td [°C] (C) Frost point temperature Tf [°C] (D)	Output 1 Output 2	Select according to Ordering Guide (A -D) Select according to Ordering Guide (A -D)
<b>Type of output signals</b>	0 - 1V (1) 0 - 5V (2) 0 - 10V (3) 0 - 20mA (5) 4 - 20mA (6)		Select according to Ordering Guide(1-6)
<b>Temperature unit</b>	°C °F		<b>E01</b> <b>E01</b>
<b>Scaling of T-output</b>	-40...60 (T02) -40...120 (T12) -40...248 (T78)	Output T	Select according to Ordering Guide (Txx)
<b>Scaling of Td-output</b>	-10...50 (T03) 20...120 (T15) 0...140 (T85)	Output Td	Select according to Ordering Guide (Tdx)
<b>Scaling of Tf-output in °C or °F</b>	0...50 (T04) -30...60 (T20) 0...248 (T87) 0...100 (T05) 0...80 (T21) 32...120 (T90) 0...60 (T07) -40...80 (T22) 32...140 (T91) -30...70 (T08) -20...80 (T24) 32...248 (T93) -30...120 (T09) -20...60 (T25) 32...132 (T96) -20...120 (T10) -30...50 (T45) -10...70 (T11) -20...50 (T48)	Output Tf	Select according to Ordering Guide (Tfxx) <small>Other T/Td/Tf-scaling refer to data sheet „T-Scalings“</small>
<b>Display mode</b>	measurand output 1+2 alternating measurand output 1 measurand output 2	<b>M12</b> <b>M01</b> <b>M02</b>	<b>M12</b> <b>M01</b> <b>M02</b>

1) Combination alarm output and plugs is not possible (with cable glands only) / combination alarm output and integrated power supply is not possible / alarm output for RH only  
2) Integrated power supply includes 2 plugs for power supply and outputs / further plug options are not possible

## Accessories (additional information see data sheet "Accessories")

- filter caps (HA0101xx)
- external power supply unit (V02)
- display + housing cover in metal (D03M)
- display + housing cover in polycarbonate (D03P)
- mounting flange (HA010201)
- mounting flange 5mm (for model H only) (HA010208)
- bracket for installation onto mounting rails\* (HA010203)
- spare part sensor (FE09 or FE09-HC01)
- drip water protection (HA010503)
- calibration set (HA0104xx)
- radiation shield (HA010502)

\*Note: Only for plastic housing, not for metal housing

## Order Example

**EE23-MFTC6025D03/AC2-Td04-M01**

- housing: metal housing  
type: humidity + temperature  
model: remote sensor probe  
filter: metal grid  
cable length: 2 m (6.6ft)  
probe length: 200 mm (7.9")  
display: with display  
output 1: rF  
output 2: Td  
output signal: 0-5V  
scaling of T-output: 0...50°C  
display mode: measurand output 1