



—  
your partner  
in sensor  
technology.

# + Datasheet EE160

Humidity and Temperature Sensor  
for Building Automation



# EE160

## Humidity and Temperature Sensor for Building Automation

The EE160 is optimized for cost effective, accurate measurement of relative humidity (RH) and temperature (T) in building automation.

### Reliable

Best long-term stability even in polluted or aggressive environment is ensured by the encapsulated measurement electronics inside the probe and E+E proprietary coating of the sensing element.

### Versatile

The measured data is available on two voltage or current (2-wire) outputs, or on the RS485 interface with Modbus RTU protocol. Additionally, the EE160 features a passive T output and an optional display visualises RH and T values simultaneously.

### Functional Design

EE160 is available for wall or duct mount. The IP65/NEMA 4X enclosure minimizes installation costs and provides outstanding protection against contamination and condensation.

### Comfortable Configuration and Adjustment

With an optional configuration stick and the free PCS10 Product Configuration Software, the user can set the RS485 interface parameters, the output scaling and perform an offset or two point adjustment for RH and T.



EE160 for wall mounting with display



EE160 for duct mounting without display

# Features

## Appropriate for US mounting requirements

- Knockout for 1/2" conduit fitting

## External mounting holes

- Easy and fast mounting with closed cover
- Electronics protected against construction site pollution

## Electronics on the backside of the board

- Optimum protection against mechanical damage during installation

## Encapsulated electronics

- Protected against condensation
- Rugged construction

## Display

- Two display lines for RH and T values
- Unit selection °C/°F according to the order code
- Threshold setting for T using PCS10

## Smooth cover surface

- No dust accumulation in protruding edges

## Enclosure


- IP65/NEMA 4X

## Bayonet screws

- Open/close with a 1/4 rotation

## E+E humidity sensing element

- Very robust
- Protected sensor surface and solder pads
- Patented sensor technology

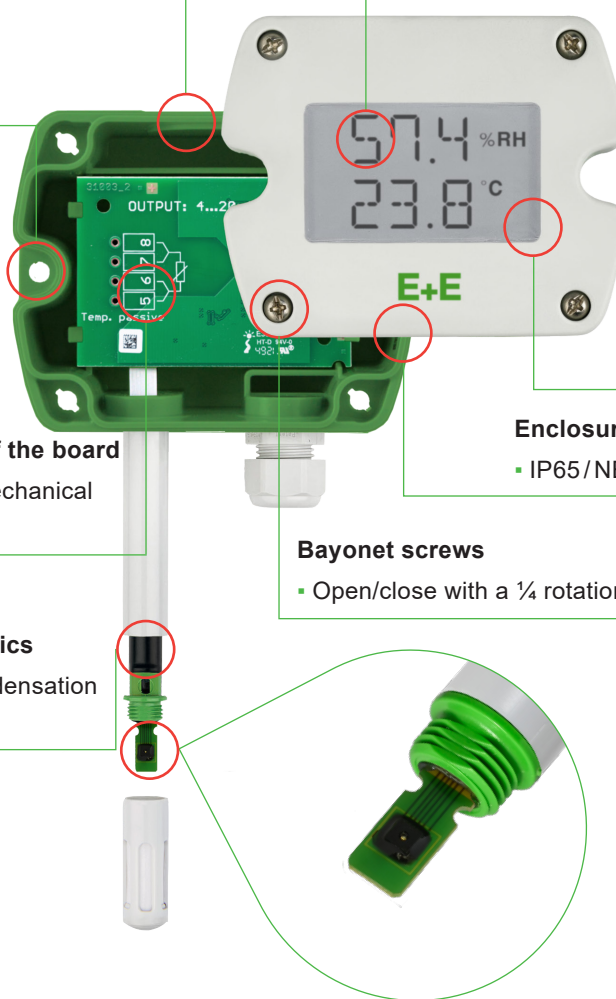


## Inspection certificate

According to DIN EN 10204-3.1

# Features

## Protective Sensor Coating

The E+E proprietary sensor coating is a protective layer applied to the active surface of the sensing element. The coating substantially extends sensor lifetime and ensures optimal measurement performance in corrosive environment (salts, off-shore applications). Additionally, it improves the sensors' long term stability in dusty, dirty or oily applications by preventing stray impedance caused by deposits on the active sensor surface.

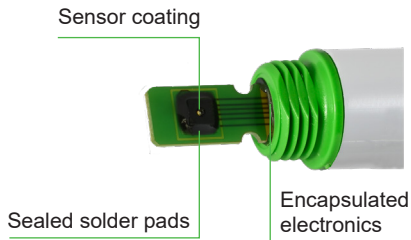


Sensing head with sensor coating and underfiller


# Dimensions

Values in mm (inch)

## Type T1 wall mount

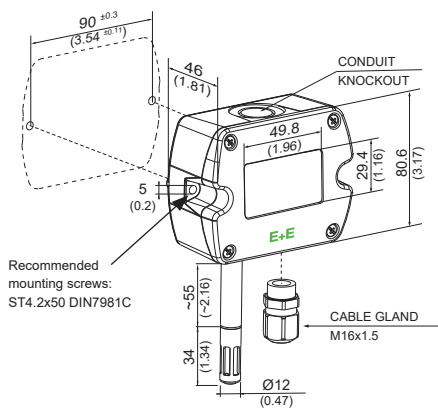


## Type T2 duct mount

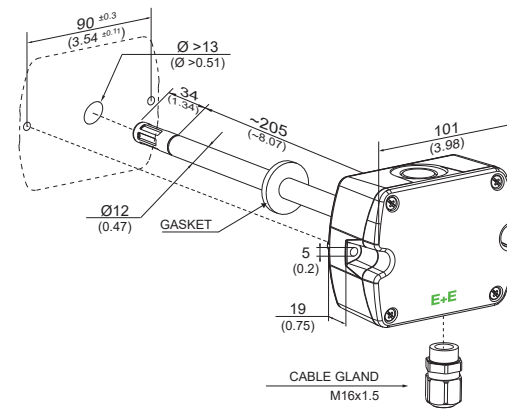

## Mounting flange

in the scope of supply for type T2

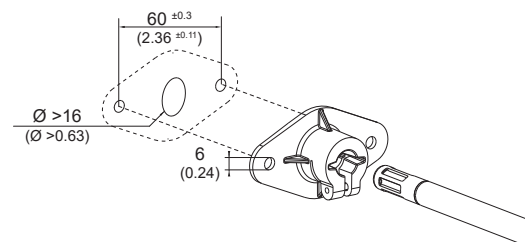

# Technical Data

## Measurands

### Relative Humidity (RH)

<b>Measuring range</b>	0...100 %RH, non-condensing	
<b>Accuracy<sup>1)</sup></b> (incl. hysteresis, non-linearity and repeatability)	23 °C <sup>2)</sup> (0...100 %RH) ±2 %RH 0...+40 °C (0...100 %RH) ±2.5 %RH -20...+60 °C (0...100 %RH) ±3.5 %RH -40...-20 °C (0...100 %RH) ±4.5 %RH	
<b>Factory calibration uncertainty<sup>3)</sup></b>	0...90 %RH ±(0.7 + 0.003 * mv) %RH >90...100 %RH ±1 %RH	mv = measured value

- 1) Defined against E+E calibration reference.
- 2) ±0.02 %RH/°C in the range of 23 °C ±10 °C (73.4 °F ± 18 °F)
- 3) Defined at 23 °C (73,4 °F) with an enhancement factor k=2, corresponding to a confidence level of 95 %.

### Temperature (T)

<b>Measuring range</b>	-40...+60 °C (-40...+140 °F)	
<b>Accuracy<sup>1)</sup></b>		
<b>Factory calibration uncertainty<sup>2)</sup></b>	±0.1 °C (±0.056 °F)	

- 1) Defined against E+E calibration reference.
- 2) Defined at 23 °C (73,4 °F) with an enhancement factor k=2, corresponding to a confidence level of 95 %.

## Outputs

### Analogue

<b>RH: 0...100 %, T: see ordering guide</b>	4 - 20 mA (2-wire) 0 - 10 V	$R_L \leq 500 \Omega$ $0 \text{ mA} < I_L < 1 \text{ mA}$	$R_L$ = load resistance $I_L$ = load current
<b>Accuracy @23 °C (68 °F)</b>	± 0.075 % fs		fs = full scale (20 mA, 10 V)

### T Sensor Passive




<b>Type acc. to ordering code</b>	4-wire connection
-----------------------------------	-------------------

### Digital

<b>Digital interface</b>	RS485 (EE160 = 1 unit load)
<b>Protocol</b>	Modbus RTU
<b>Factory settings</b>	Baud rate acc. to ordering code, parity even, 1 stop bit, Modbus address 245
<b>Supported baud rates</b>	9 600, 19 200 and 38 400
<b>Data types for measured values</b>	FLOAT32 and INT16

# Technical Data

## General

<b>Power supply</b> class III  USA & Canada: Class 2 supply necessary, max. voltage 30 V DC	<b>4 - 20 mA (2-wire)</b>	(10 V + R <sub>L</sub> * 20 mA) < V+ < 35 V DC		
	<b>0 - 10 V RS485</b>	15 - 35 V DC or 24 V AC ±20%		
<b>Current consumption, typ.</b>		<b>4 - 20 mA output</b>	<b>0 - 10 V output</b>	<b>RS485</b>
	<b>24 V DC supply</b>	According to output current, max. 40 mA	<3 mA / <5 mA with Display	5 mA
	<b>24 V AC supply</b>	-	<8 mA <sub>eff</sub> / <10 mA <sub>rms</sub> with Display	15 mA <sub>rms</sub>
<b>Electrical connection</b>	Screw terminals max. 1.5 mm <sup>2</sup> (AWG 16)			
<b>Cable gland</b>	M16x1.5			
<b>Storage conditions</b>	-40...+60 °C (-40...+140 °F)			
<b>Enclosure</b>	<b>Material</b>	Polycarbonate (PC), UL94 V-0 approved		
	<b>Protection rating</b>	IP65/NEMA 4X		
<b>Electromagnetic compatibility</b>	EN 61326-1 FCC Part15 ClassA	EN 61326-2-3 ICES-003 ClassA	Industrial environment	
<b>Conformity</b>	EN 45545-2 (HL3)			

# Ordering Guide

Feature	Description	Code		
Hardware configuration		EE160-		
	Model	RH + T	M1	M1
		RH + T + T passive		M8
	Type	Wall mount	T1	
		Duct mount	T2	
	Output	0 - 10 V	A3	
		4 - 20 mA	A6	
		RS485		J3
	T sensor passive <sup>1)</sup>	Pt100 DIN A		TP1
		Pt1000 DIN A		TP3
NTC10k			TP5	
Ni1000, TK6180			TP9	
Filter	Membrane	No code		
Display	Without display	No code		
	With display without backlight	D1		
Setup analogue out	Relative humidity	0...100 %RH		No code
	Temperature <sup>2)</sup>	T [°C]		No code
		T [°F]		MB2
	T scaling low	-40		No code
		Value		SBLValue
	T scaling high	60		No code
		Value		SBHValue
Setup RS485	Protocol	Modbus RTU <sup>3)</sup>		P1
	Baudrate	9600		BD5
		19200		BD6
		38400		BD7
	Units <sup>2)</sup>	Metric (SI)		No code
Non-metric (US/GB)		U2		

1) With Model M8 only / T sensor. Details see [www.epluse.com/R-T\\_Characteristics](http://www.epluse.com/R-T_Characteristics).

2) Can not be changed with PCS10.

3) Modbus map and configuration guide see user manual or Modbus application note at [www.epluse.com/ee160](http://www.epluse.com/ee160).

## Order Example

EE160-M8T1A6TP1D1SBL-10SBH50

Feature	Code	Description
Model	M8	RH + T + T passive
Type	T1	Wall mount
Output	A6	4 - 20 mA
T sensor passive	TP1	Pt100 DIN A
Filter	No code	Membrane
Display	D1	With display without backlight
Relative humidity	No code	0...100 %RH
Temperature	No code	T [°C]
Scale T low	SBL-10	-10 °C
Scale T high	SBH50	+50 °C

# Order Example


## EE160-M1T2J3P1BD5U2

Feature	Code	Description
Model	<b>M1</b>	RH + T
Type	<b>T2</b>	Duct mount
Output	<b>J3</b>	RS485
Filter	<b>No code</b>	Membrane
Protocol	<b>P1</b>	Modbus RTU
Baud rate	<b>BD5</b>	9600
Units	<b>U2</b>	Non-metric

## Accessories

For further information see datasheet [Accessories](#).

Accessories	Code
E+E Product configuration software (Free download: <a href="http://www.epluse.com/pcs10">www.epluse.com/pcs10</a> )	<b>PCS10</b>
Power supply adapter	<b>V03</b>
Protection cap for Ø12 mm probe	<b>HA010783</b>
USB-C configuration stick	<b>HA011070</b>

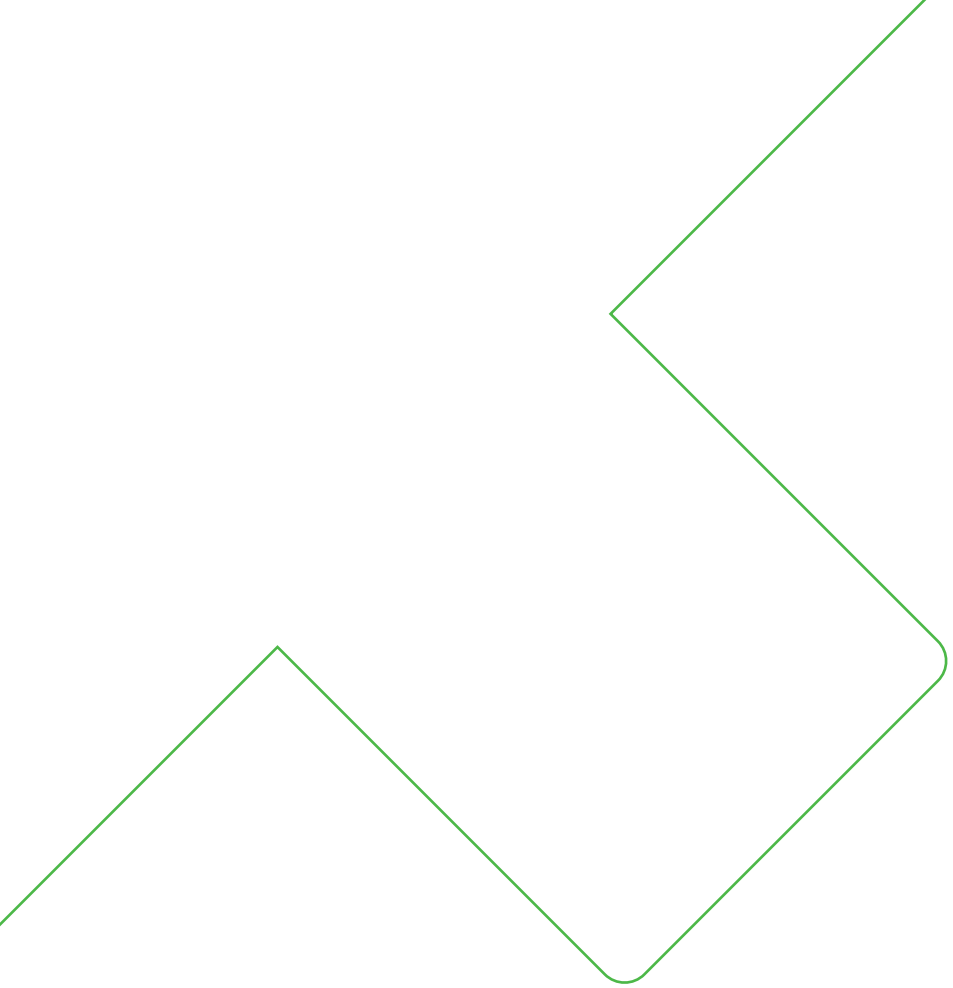

Company Headquarters &  
Production Site

**E+E Elektronik Ges.m.b.H.**  
Langwiesen 7  
4209 Engerwitzdorf | Austria  
T +43 7235 605-0  
F +43 7235 605-8  
info@epluse.com  
www.epluse.com

Subsidiaries

**E+E Sensor Technology (Shanghai) Co., Ltd.**  
T +86 21 6117 6129  
info@epluse.cn

**E+E Elektronik France SARL**  
T +33 4 74 72 35 82  
info.fr@epluse.com

**E+E Elektronik Deutschland GmbH**  
T +49 6171 69411-0  
info.de@epluse.com

**E+E Elektronik India Private Limited**  
T +91 990 440 5400  
info.in@epluse.com

**E+E Elektronik Italia S.r.l.**  
T +39 02 2707 86 36  
info.it@epluse.com

**E+E Elektronik Korea Ltd.**  
T +82 31 732 6050  
info.kr@epluse.com

**E+E Elektronik Corporation**  
T +1 847 490 0520  
info.us@epluse.com



—  
your partner  
in sensor  
technology.