

The DR01 is a research grade normal incidence direct solar irradiance sensor (also known as a pyr heliometer). Suitable for tracker mounted operation, the DR01 is intended for short wave direct solar irradiance. The DR01 is a 'First Class' compliant pyr heliometer, as per the latest ISO and WMO standards.

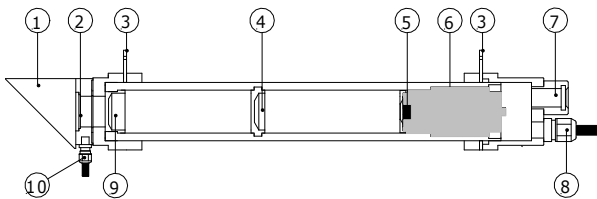


Figure 1: DR01 pyr heliometer : (1) protection cap, (2) window with heater, (3) sight, (5) sensor, (7) humidity indicator, (10) cable for heater

**INTRODUCTION**

The DR01 foreoptic assembly features a precision ground and polished quartz window/lens, for true spectral solar transmission ranging from 0.2 - 4.0  $\mu\text{m}$ . As per the latest ISO-9060 and WMO standards, the full opening view angle of the DR01 is collimated precisely to 5.0° degrees, making the sensor ideally suited for normal incidence direct solar irradiance measurement. Capable of measuring up to two suns, 2000  $\text{W}/\text{m}^2$ , the DR01 pyr heliometer can be deployed anywhere on earth. The instrument employs a passive thermopile-based sensing technology that generates a low level DC millivolt output signal proportional to the normal incident direct solar flux received at the detector surface. The DR01 also features a thermally isolated low power window/lens heater in the foreoptic; when cycled on/off prior to sunrise the heater effectively eliminates the formation of dew on the pyr heliometer window/lens, thus resulting in improved post sunrise early morning measurement accuracy.

Typical DR01 measurement applications include scientific meteorological/climate observations, material testing research, solar collector/PV panel efficiency and solar renewable resource assessment. Each DR01 is calibrated upon manufacture and delivered standard with a WRR (World Radiometric Reference) traceable certificate of calibration.

**SUGGESTED USE**

- climatology / meteorology
- material testing research
- solar collector and PV panel efficiency validation
- solar renewable resource assessment

**MORE INFORMATION / OPTIONS**

Optional: extended cable, AC100 / AC420 amplifiers.  
Various tracking solutions can be offered by SENS OVANT

**DR01 SPECIFICATIONS**

ISO classification:	First Class
Spectral range:	200 to 4000 nm
DR01 Response time (95%):	18 s
Full opening view angle:	5 degrees
Slope angle:	1 degree
Irradiance range :	0 to 2000 $\text{W}/\text{m}^2$
Sensitivity (nominal):	10 $\mu\text{V}/\text{W}/\text{m}^2$
Temperature range:	-40 to +80° C
Temperature dependence:	< 0.1%/°C
Non stability (drift):	< 1% per year
Calibration traceability:	WRR
Cable length:	5 m standard (longer lengths optional)